


PIN	1	2	3	4	5	6	7	8	9
COM	COM	DP1	1E	1D	1C	DP2	2E	2D	2C
PIN	10	11	12	13	14	15	16	17	18
COM	2B	2A	2F	2G	1B	1A	1F	1G	COM

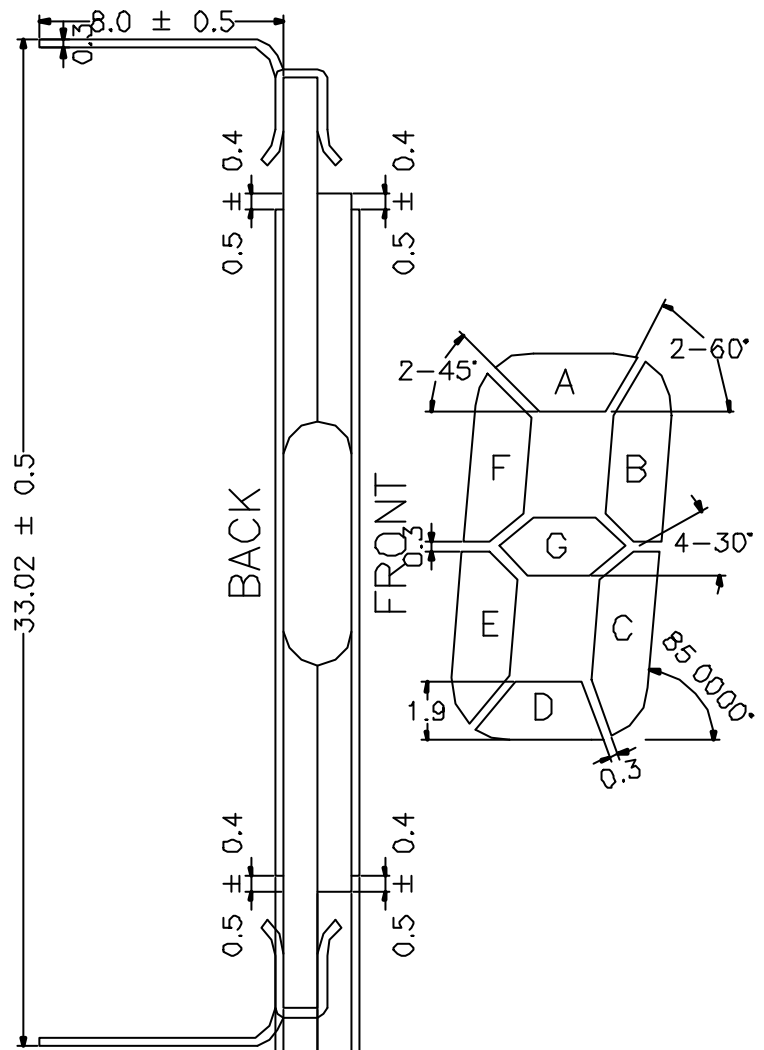

DISPLAY TYPE: TN/POSITIVE  
 VIEWING DIRECTION: 6:00  
 DISPLAY MODE: REFLECTIVE & TRANSLUCENTIVE  
 DRIVING METHOD: STATIC  
 OPERATING VOLTAGE: 5.0V  
 OPERATING TEMPERATURE: -30°~85°C  
 STORAGE TEMPERATURE: -30°~85°C  
 CONNECTOR: PIN