


PIN	COM	PIN	COM	PIN	COM	PIN	COM
1	COM	11	1C	21	3A	31	1F
2	Y	12	2DP	22	3F	32	1G
3	K	13	2E	23	3G	33	NC
4	NC	14	2D	24	2B	34	NC
5	NC	15	2C	25	2A	35	NC
6	NC	16	3DP	26	2F	36	NC
7	NC	17	3E	27	2G	37	NC
8	1DP	18	3D	28	COL	38	LOBAT
9	1E	19	3C	29	1B	39	X
10	1D	20	3B	30	1A	40	COM

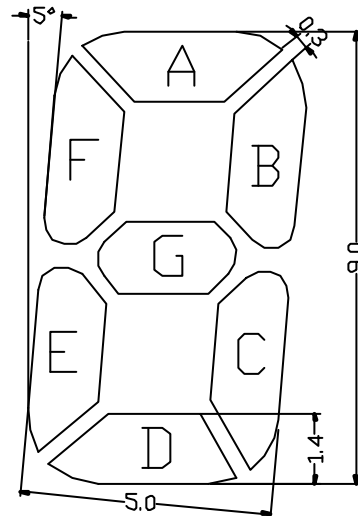

DISPLAY TYPE: TN/POSITIVE
 DISPLAY MODE: TRANFLECTIVE/REFLECTIVE
 VIEWING DIRECTION: 6:00
 DRIVING METHOD: STATIC
 OPERATING VOLTAGE: 5.0V
 OPERATING TEMPERATURE: -30~80°C
 STORAGE TEMPERATURE: -30~80°C
 CONNECTOR: PIN