


PIN	1	2	3	4	5	6	7	8	9	10
COM	COM	--	--	--	4E	4D	4C	DP3	3E	3D
PIN	11	12	13	14	15	16	17	18	19	20
COM	3C	DP2	2E	2D	2C	DP1	1E	1D	1C	1B
PIN	21	22	23	24	25	26	27	28	29	30
COM	1A	1F	1G	2B	2A	2F	2G	L	3B	3A
PIN	31	32	33	34	35	36	37	38	39	40
COM	3F	3G	--	4B	4A	4F	4G	--	--	COM

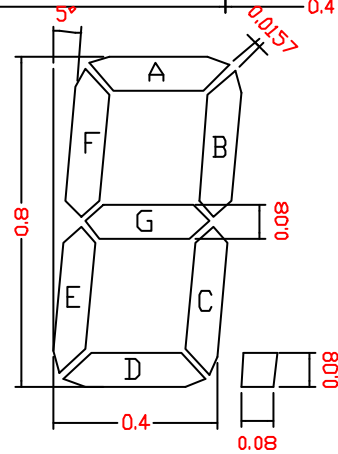

DISPLAY TYPE: TN/POSITIVE
VIEWING DIRECTION: 12:00
DISPLAY MODE: REFLECTIVE
DRIVING METHOD: STATIC
OPERATING VOLTAGE: 5.0V
OPERATING TEMPERATURE: -30°~85°C
STORAGE TEMPERATURE: -35°~90°C
CONNECTOR: PIN