


PIN	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
COM1	COM1	1G	1A	2G	2A	3G	3A	4G	4A	5G	5A	6G	6A	7G	7A	8G	8A	
COM2		1P	1B	2P	2B	3P	3B	4P	4B	5P	5B	6P	6B	7P	7B	8P	8B	COM2
COM3		1N	1C	2N	2C	3N	3C	4N	4C	5N	5C	6N	6C	7N	7C	8N	8C	
COM4		1M	DP1	2M	DP2	3M	DP3	4M	DP4	5M	DP5	6M	DP6	7M	DP7	8M		

PIN	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36
COM1		8H	AP7	7H	AP6	6H	AP5	5H	AP4	4H	AP3	3H	AP2	2H	AP1	1H		
COM2		8J	8F	7J	7F	6J	6F	5J	5F	4J	4F	3J	3F	2J	2F	1J	1F	
COM3		8K	8E	7K	7E	6K	6E	5K	5E	4K	4E	3K	3E	2K	2E	1K	1E	COM3
COM4	COM4	8L	8D	7L	7D	6L	6D	5L	5D	4L	4D	3L	3D	2L	2D	1L	1D	

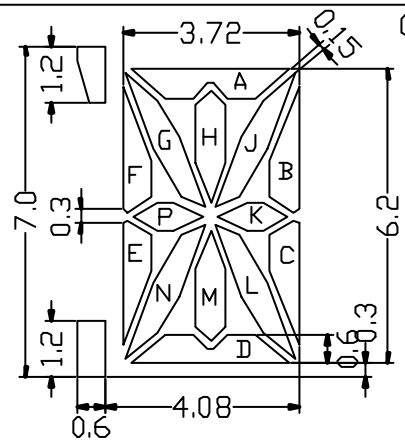

DISPLAY TYPE: TN/POSITIVE
 DISPLAY MODE: TRANSFLECTIVE
 VIEWING DIRECTION: 600
 DRIVING METHOD: 1/4 DUTY 1/3 BIAS
 OPERATING VOLTAGE: $V_{10}=2.87V$ $V_{90}=1.6V$
 OPERATING TEMPERATURE: $-30^{\circ}\sim 85^{\circ}C$
 STORAGE TEMPERATURE: $-40^{\circ}\sim 90^{\circ}C$
 CONNECTOR: ZEBRA