


PIN	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
COM1			1I		2I		3I		4I		5I		6I		7I		8I	
COM2		1F	1J	2F	2J	3F	3J	4F	4J	5F	5J	6F	6J	7F	7J	8F	8J	
COM3		1E	1K	2E	2K	3E	3K	4E	4K	5E	5K	6E	6K	7E	7K	8E	8K	COM3
COM4	COM4	1D	1N	2D	2N	3D	3N	4D	4N	5D	5N	6D	6N	7D	7N	8D	8N	
PIN	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36
COM1	COM1	8A	8H	7A	7H	6A	6H	5A	5H	4A	4H	3A	3H	2A	2H	1A	1H	
COM2		8B	8G	7B	7G	6B	6G	5B	5G	4B	4G	3B	3G	2B	2G	1B	1G	COM2
COM3		8C	8L	7C	7L	6C	6L	5C	5L	4C	4L	3C	3L	2C	2L	1C	1L	
COM4		DP8	8M	DP7	7M	DP6	6M	DP5	5M	DP4	4M	DP3	3M	DP2	2M	DP1	1M	

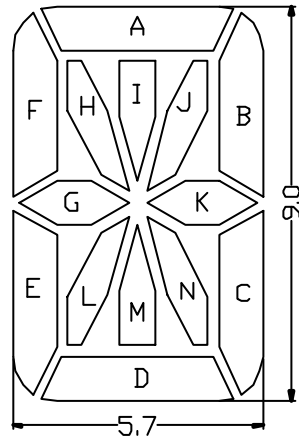

DISPLAY TYPE: TN/POSITIVE
 DISPLAY MODE: REFLECTIVE
 VIEWING DIRECTION: 600
 DRIVING METHOD: 1/4 DUTY 1/3 BIAS
 OPERATING VOLTAGE: 5.0V
 OPERATING TEMPERATURE: $-10^{\circ} \sim 60^{\circ} \text{C}$
 STORAGE TEMPERATURE: $-30^{\circ} \sim 70^{\circ} \text{C}$
 CONNECTOR: PIN